


**SEL RFID MF- MIFARE Reader/Writer Connection Diagram**

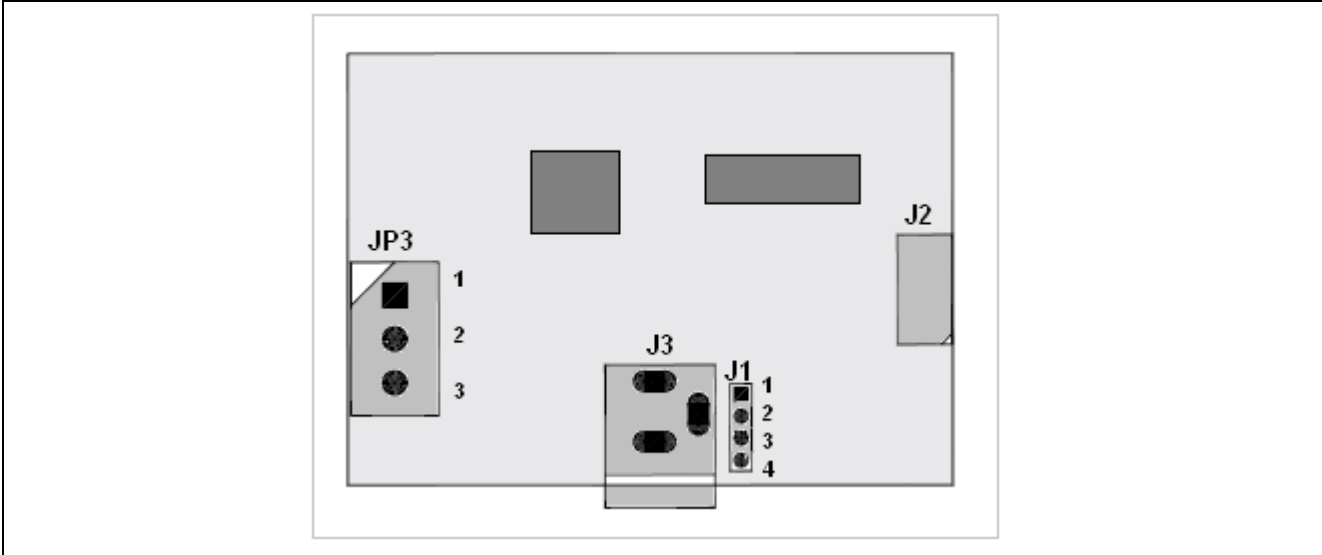

Male Berg Pin -- J 1		
PIN NO.	SIGNAL	DESCRIPTION
1	TxD	Output RS232
2	RxD	Input RS232
3	GND	-
4	No Connection	-

Relay Contact -- JP3	
PIN NO.	DESCRIPTION
1	Common
2	N/O
3	N/C

\*Relay Contact Rating 2A 120V AC / 2A 24V DC

DC Input - 9 – 12V DC -300mA-- J3	
PIN	SIGNAL
Center Pin	+ve
Outer Pin	-ve/GND

<b>J2</b>	Antenna Connection
-----------	--------------------